



15" Signature Series Wine Reserve

- Model Nos.** HP15WS-1L HP15WS-2L HP15WS-3L HP15WS-4L
 HP15WO-1L HP15WO-2L HP15WO-3L HP15WO-4L

* Also available with right hinge

Job _____
Area _____
Item No. _____
Model No. _____



HP15WS-1R



HP15WS-3L

Features

- Designed with fully-integrated depth to allow flush fit with surrounding cabinetry
- Zero-clearance hinging allows for abutment with surrounding cabinetry
- With 3/4" wood overlay, the unit will stand flush with cabinetry
- Best in class 700 Btu commercial grade compressor
- Front-vented, forced-air refrigeration system
- **Industry Exclusive** commercial grade stainless steel interior in 15" units
- **Industry Exclusive** Convertible Door Design allows all doors the ability to be converted to wood overlay from stainless steel
- Low E, UV coated glass provides industry leading insulation and protection
- Whisper quiet performance allows unit to be used in any room of a residence or office
- Door locks available

Wine Reserve Features

- Storage for up to 20 bottles of wine
- Stainless steel ball bearing glides provide smooth movement of shelves
- Shelves are removable and adjustable to accommodate oversized (magnum) bottles
- Cabinet construction eliminates vibration transfer to reserve
- Wine Reserve temperature 40° - 65° F
- Indoor/outdoor rated models

Luxury YOU DESIRE
INNOVATION YOU CAN'T LIVE WITHOUT

Form No.080210
Rev. 07.06.2011



8300 W. Good Hope Rd. • Milwaukee, WI 53223
1-800-558-5592 • Fax: (414) 353-7069 • perlick.com


Perlick is committed to continuous improvement. Therefore, we reserve the right to change specifications without warning.

15" Signature Series Wine Reserve

Indoor Models	Outdoor Models	Wine Reserve
HP15WS-1L	HP15WO-1L	15" Wine Reserve with stainless steel glass door hinge left
HP15WS-2L	HP15WO-2L	15" Wine Reserve with integrated solid wood overlay door hinge left
HP15WS-3L	HP15WO-3L	15" Wine Reserve with stainless steel glass door hinge left
HP15WS-4L	HP15WO-4L	15" Wine Reserve with integrated wood overlay glass door hinge left

** Also available with right hinge*

Overall Width	14-7/8", 37.783 cm	Door Swing Clearance	16"
Overall Height	34-1/4", 86.96 cm	Annual Energy Usage	313 kWh/yr
Overall Depth	24", 60.96 cm	Electrical:	115V, 60 Hz, 1 phase AC, 2.3 amps
Capacity	3.0 cubic ft.	Plumbing:	none required
Min. Height Req.	34-3/8"	Shipping Weight:	175 lbs.

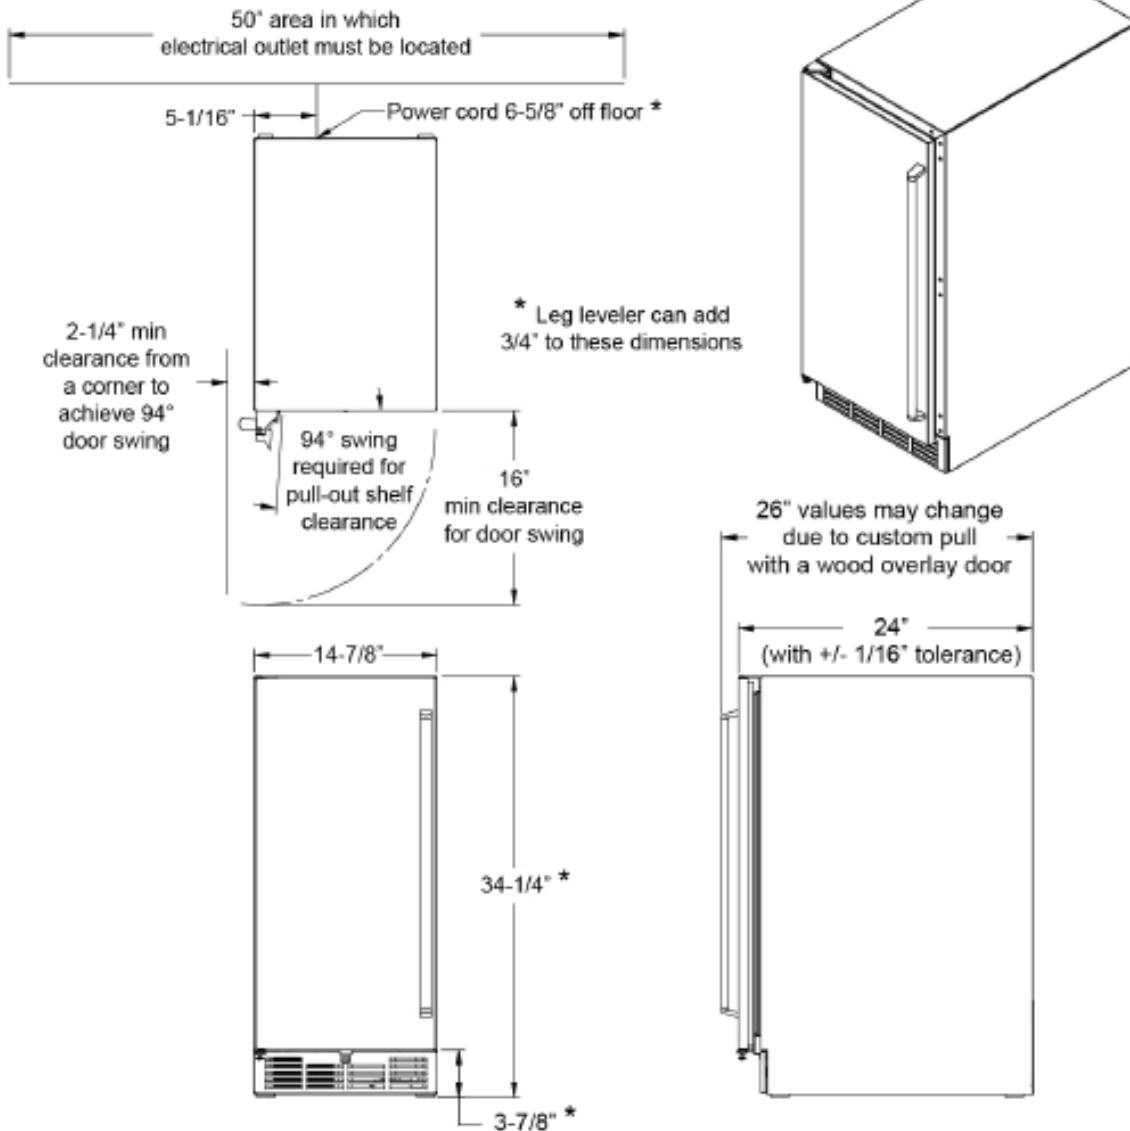

Form No.080210
Rev. 07.06.2011



8300 W. Good Hope Rd. • Milwaukee, WI 53223
1-800-558-5592 • Fax: (414) 353-7069 • perlick.com

Perlick is committed to continuous improvement. Therefore, we reserve the right to change specifications without warning.