



ICE MAKER

Perlick Features

- Front vented, forced air refrigeration system.
- UL approved for outdoor use
- Production capacity up to 53lbs per 24 hours
- Storage capacity of 25lbs
- Optional drain pump
- Clear ice production
- Individual, octagon shaped cubes
- Integrated water filter



SPECIFICATIONS

H53IMS Perlick Ice Maker

Operating Limits

Ambient Temp Range: 50-110°F
Water Temp Range: 35-90°F
Voltage Range: 104-127V
Water Pressure: 20-80 psig

Door Options

Solid stainless steel

Shipping Weight

55 lbs

Production

Up to 53 lbs. Of ice per
24 hours

Electrical & Plumbing

115/60/1
15 amp Max Fuse
3/8" BSP Inlet, 3/4" FPT Drain

Features

Durable stainless steel exterior
UL approval for outdoor use
Power switch accessible without panel
removal
Front in, front out airflow
Optional drain pump

Storage Bins


Up to 25lb. capacity built-in bin

Refrigeration

R-134A Hermetic closed system
Forced-air condenser

Warranty

2 year parts and labor from
date of original installation

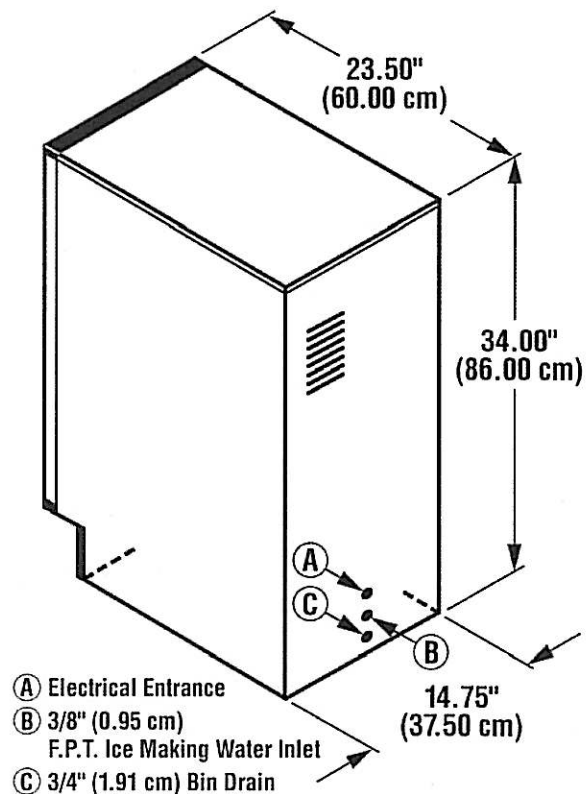

Installation Note - There is no minimum clearance required, designed to be integrated into cabinet opening 15.00" (38.00 cm) wide.

